



INDUSTRY IS
KEEPING CHANGE
BECAUSE OF US

行业因我们而改变



浙江欧诺机械科技股份有限公司
ZHEJIANG OUNUO MACHINERY TECH. CO.,LTD

Binhai New Industrial Estate, Pingyang County,
Wenzhou City, Zhejiang, China.
Tel: +86 577-58123188
Mob: +86 135 6771 1278
Fax: +86 577-58129959
E-mail: info@allwell-group.com

地址：浙江省温州市平阳县海西镇海润路
电话：0577-58123188
手机：137 5091 6200
传真：0577-58129959
邮箱：info@allwell-group.com



Facebook



Youtube



抖音视频



微信视频

www.allwell-group.com
www.oyang-group.com

CE ISO9001:2008

纸袋机系列

Paper Bag Machine Series



欧诺让梦想持续前行
全新数字化工厂
为您提供更全面的服务

Ounuo Let The Dream Move Forward,
Brand New Digitalized Factory Plant To Provide You With
More Comprehensive Service.



TOP BRAND

**CHANGES
THE WORLD**

中国影响力制袋印刷包装解决方案供应商


—浙江欧诺机械科技股份有限公司

SUPER INFLUENTIAL PROVIDER FOR PRINTING & PACKAGING SOLUTIONS

—Zhejiang Ounuo Machinery Tech. Co.,Ltd.

浙江欧诺机械科技股份有限公司是一家专业生产无纺布产业链、纸包装设备、纸制品设备、纸模型、数码印刷机、凹版印刷机、柔版印刷机等配套设备的生产企业。本公司创建以来，以市场为导向，以科技为依托，大力开发新产品。


Zhejiang Ounuo Machinery Tech Co., Ltd. is a professional manufacturer of rotogravure printing machine, non-woven leader machine, non-woven industry chain, paper bag making machine, paper products equipment, paper molding, digital printing machine, flexographic printing machine, pouch making machine etc. Since the establishment of OYANG, market-oriented, relying on science and technology, vigorously develop new products.

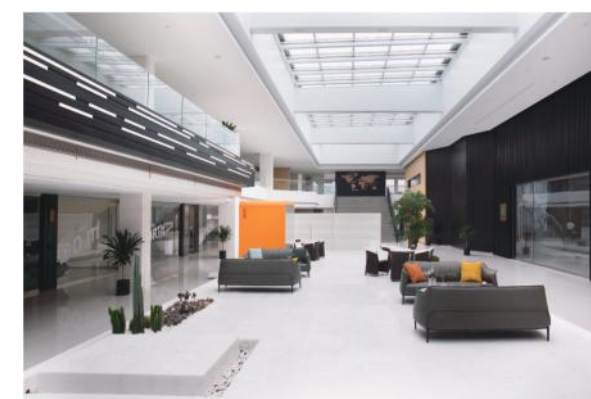

Let's Contribute For The

ENVIRONMENT RESPONSIBILITY BUSINESS

让我们一起
为环保事业做出贡献

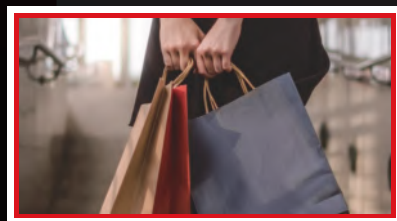

01 购物袋 Shopping Paper Bag



服装服饰，化妆品，首饰箱包，超市购物袋等外包装。

Clothing, Cosmetics, Jewelry Bags, Super-market Shopping Bags Etc.




02 食品袋 Food Bag



休闲食品包装，烘焙包装，坚果炒货包装，粮油副食品包装，生鲜水果包装，婴幼儿用具包装等。

Leisure Food Bag, Baking Bag, Nuts Fried Bag, Subsidiary Food Bag, Fruit Bag, Baby Products Etc.

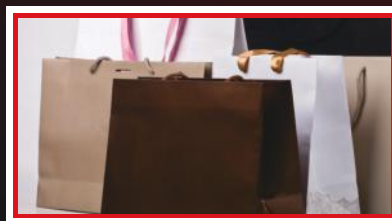

03 礼品袋 Gift Packaging



喜糖，茶叶，酒类等礼品包装。

Candy, Tea, Wine Etc.



04 运输包袋 Transport Bags




快递物流等运输外包装。

Express Logistics And Transport Packaging Etc.

纸类包装的 用途与范围

Application and scope of
paper packaging

SMART PAPER BAG FACTORY

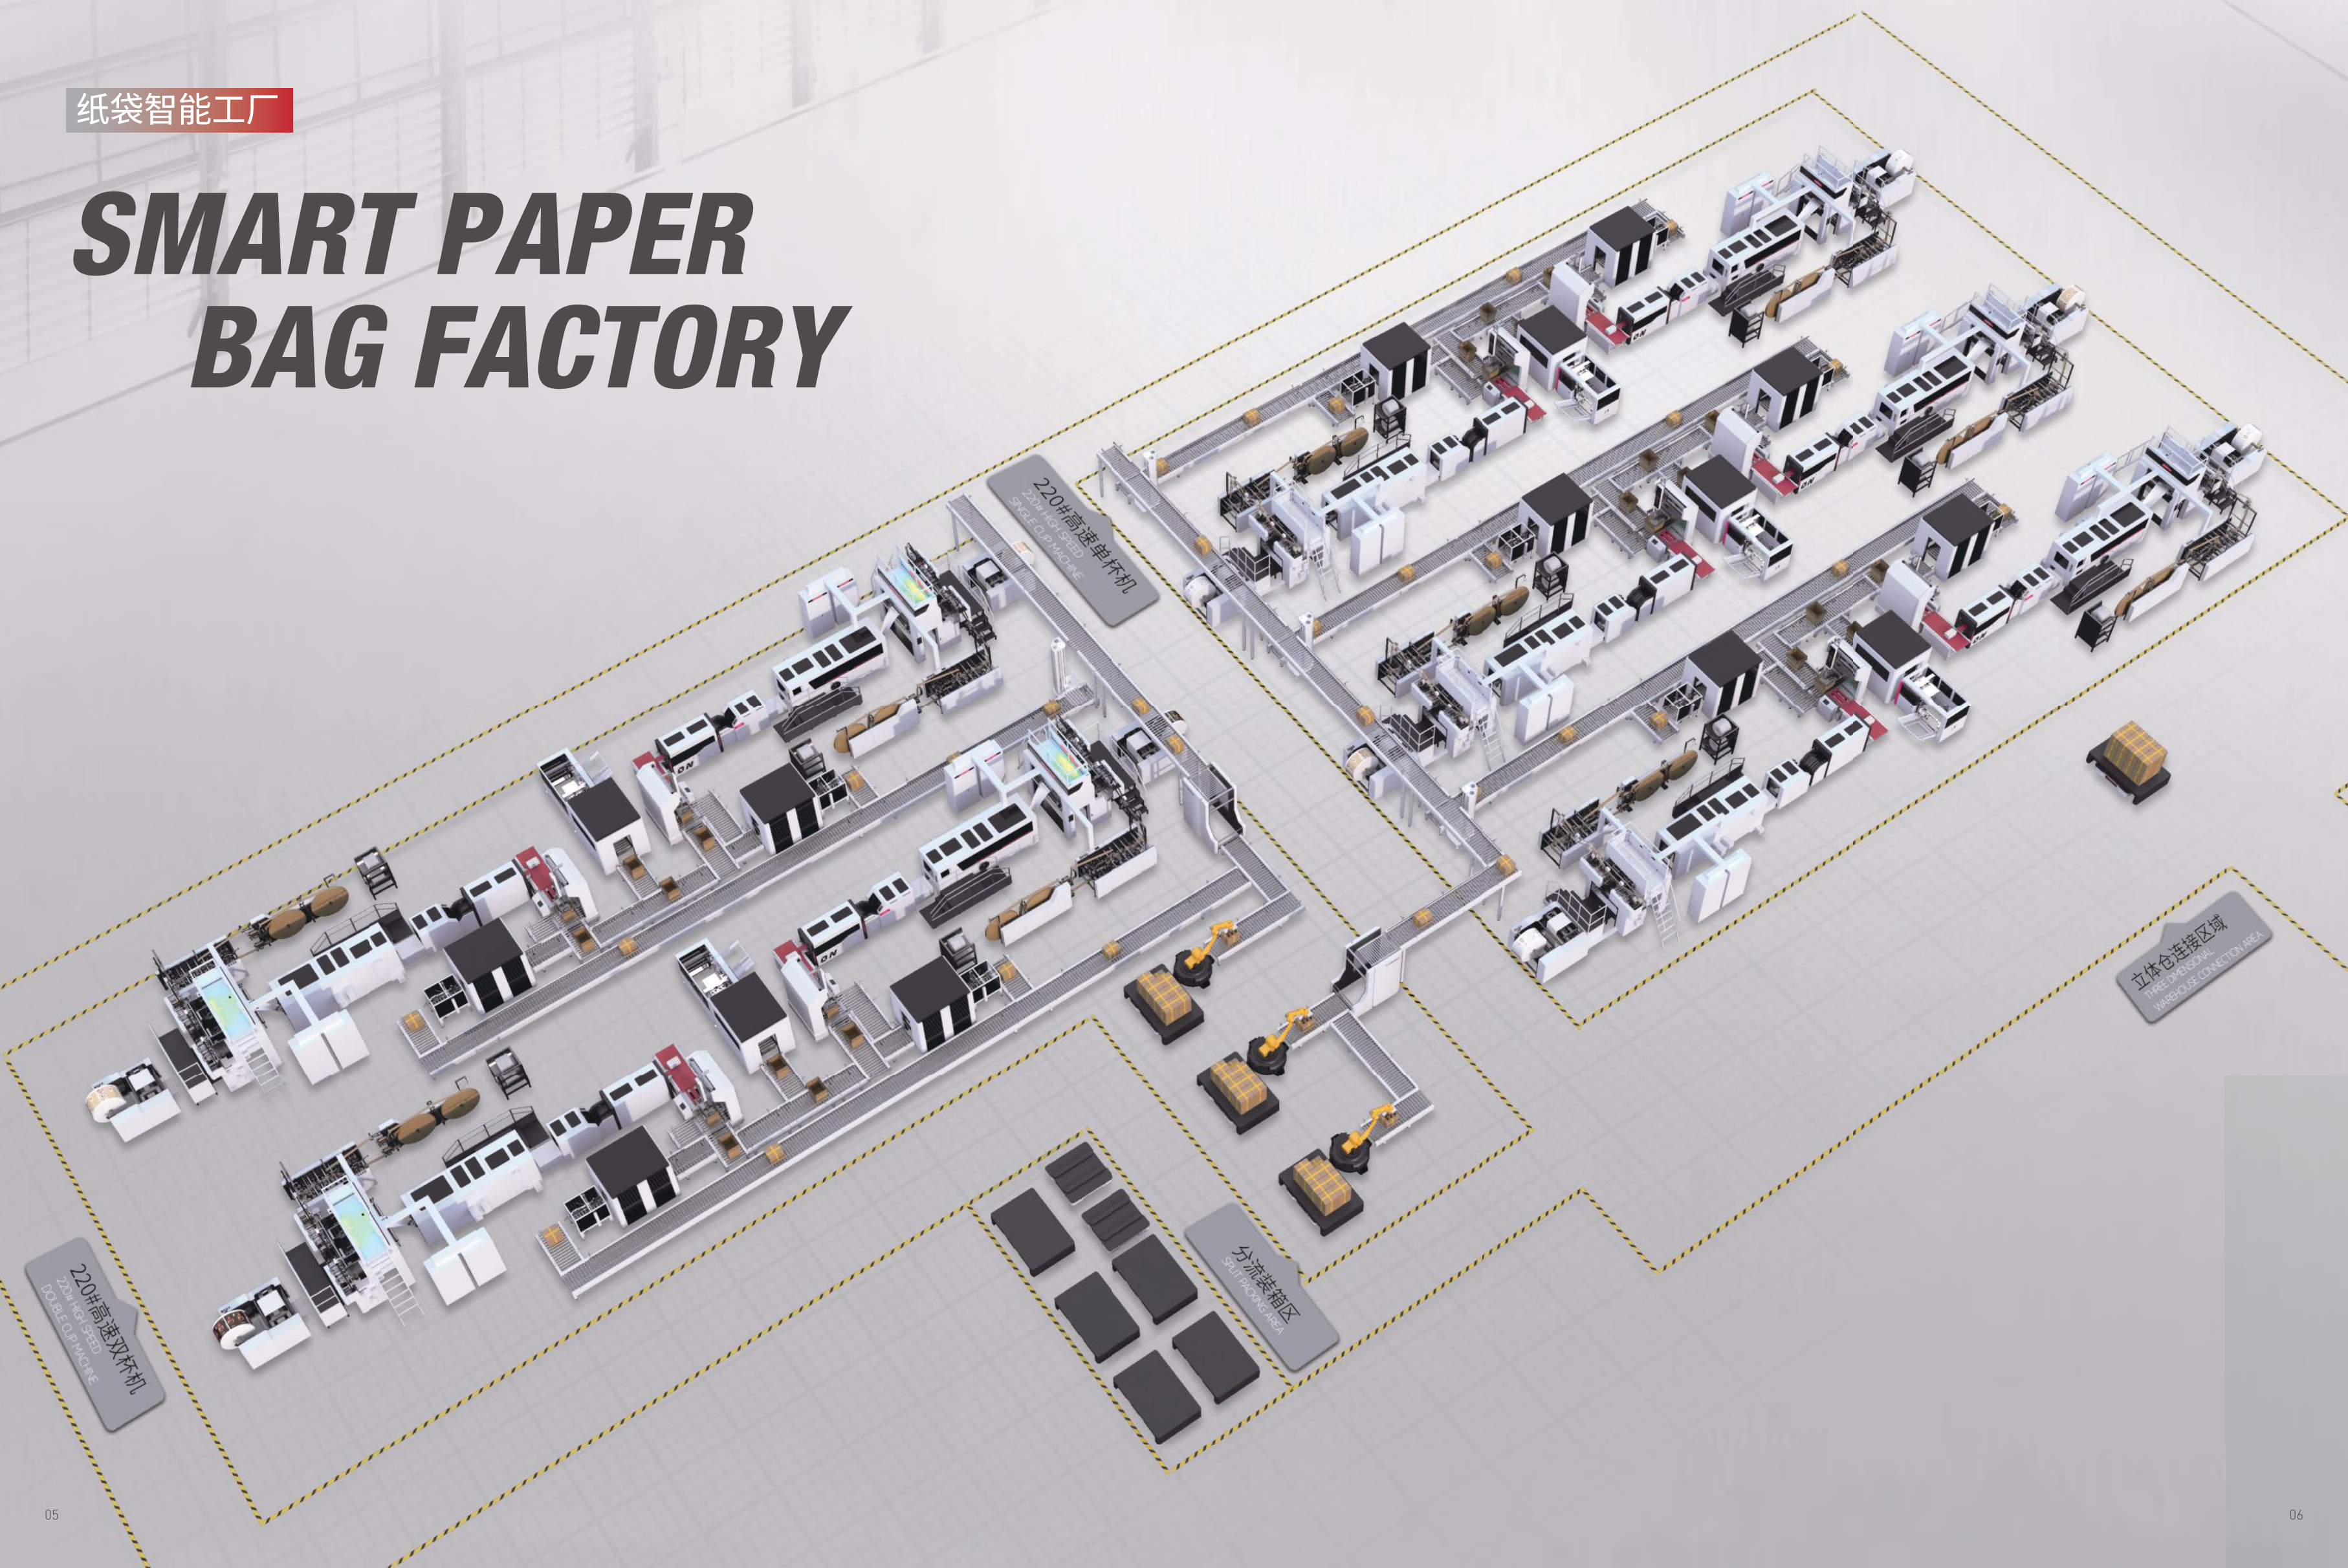

科技
TECH
400S

18

AIA 智能换规纸袋机

AIA Intelligent Bag Making Machine
with Twisted Handle

世界领先

China Pioneer

性能及特点

Feature & Characteristics

30多名机械/应用/软件工程师合作开发2年。
专为多规格量小订单而设计的一款全伺服调节机型

2 Years Of Collaborative Development By 30+ Mechanical / Application / Software Engineers.

- 1 快 / Fast

2 分钟内做完所有调节动作
换版时间仅需 15 分钟
finish all adjustments within 2 minutes,new
size paper bag comes out in 15 minutes.
- 2 准 / Accurate

所有调节位置尺寸误差 0.5MM
within 0.5mm error of all alignment
positions.

- 3 强 / Strong

可搭配数码印刷单元,解决打样,小单问题,
option with digital printing unit, to solve
the issue of sample and small orders.

- 选配功能

Optional Functions

可搭配智能检测单元,保障成品率

可搭配自动打包,节省人工

可搭配智能手把机,所有尺寸手把一机

*Inline QC unit, ensure finished bag quality

*Inline Auto packing unit, reduce labour

*Intelligent Handle Unit, handle size adjustable

New World

型号	Model No.	400S
纸卷宽度	Paper roll width	510/610-1230mm
纸料直径	Paper diameter	≤1500mm
卷芯内径	Core inner diameter	φ76mm
纸张克重	Paper weight	80-140g/m²
纸袋宽度	Paper bag width	200-400mm with handle 190-400mm without handle
纸筒长度	Paper tube length	280-550mm With handle 280-600mm Without handle
纸袋底宽	Bottom width of paper bag	90-200mm
机器速度	Machine speed	150pcs/min
总功率	Total power	54KW
机器重量	Machine weight	18000KG
机器尺寸	Machine dimensions	15000*6000*3500mm

手把机型号	Handle Model	5HD
手把绳高	Handle Rope Height	95-115mm
手把贴片宽度	Handle Patch Width	45-50mm
手把贴片长度	Handle Patch Length	152.4mm
手把绳直径	Handle Rope Diameter	φ4-6mm
手把贴片纸卷直径	Diameter Of Handle Patch Paper Roll	φ1200mm
手把贴片纸卷宽度	Handle Patch Paper Roll Width	90-100mm
手把贴片克重	Handle Patch Weight	100-140g
手把间距	Distance Of The Handle	76mm



智

SMART

17

AIA 高速智能化纸袋生产线 260s


AIA High speed 260pcs/min
intelligent paper bag making production line

性能及特点

Feature & Characteristics

专为大批量订单生产的高速纸袋机
自动拿袋、自动捆扎,自动装箱,自动开、封箱,自动码垛,用工人量少、
效率高,生产成本低、日产能突破20+万
无需专业开机师傅，新人3天就可上手操作
Designed for big volume order production , it is a high-speed machine .
Automatic bagging, automatic binding, automatic packing, automatic opening, sealing,
automatic palletizing, with a small number of labors, high efficiency, low production cost,
daily output can exceed 200,000 +
No need for professional engineer, new people can start to operate in 3 days

采用 6 等分的鼓轮，高速的封底机构；
西门子控制系统；
机械部件 80% 进口材料；保证了机器高速稳定运行。
6 Equal Parts Big Hub Wheel Design
Siemens Control System
80% of machine part from import material, ensure machine stable running

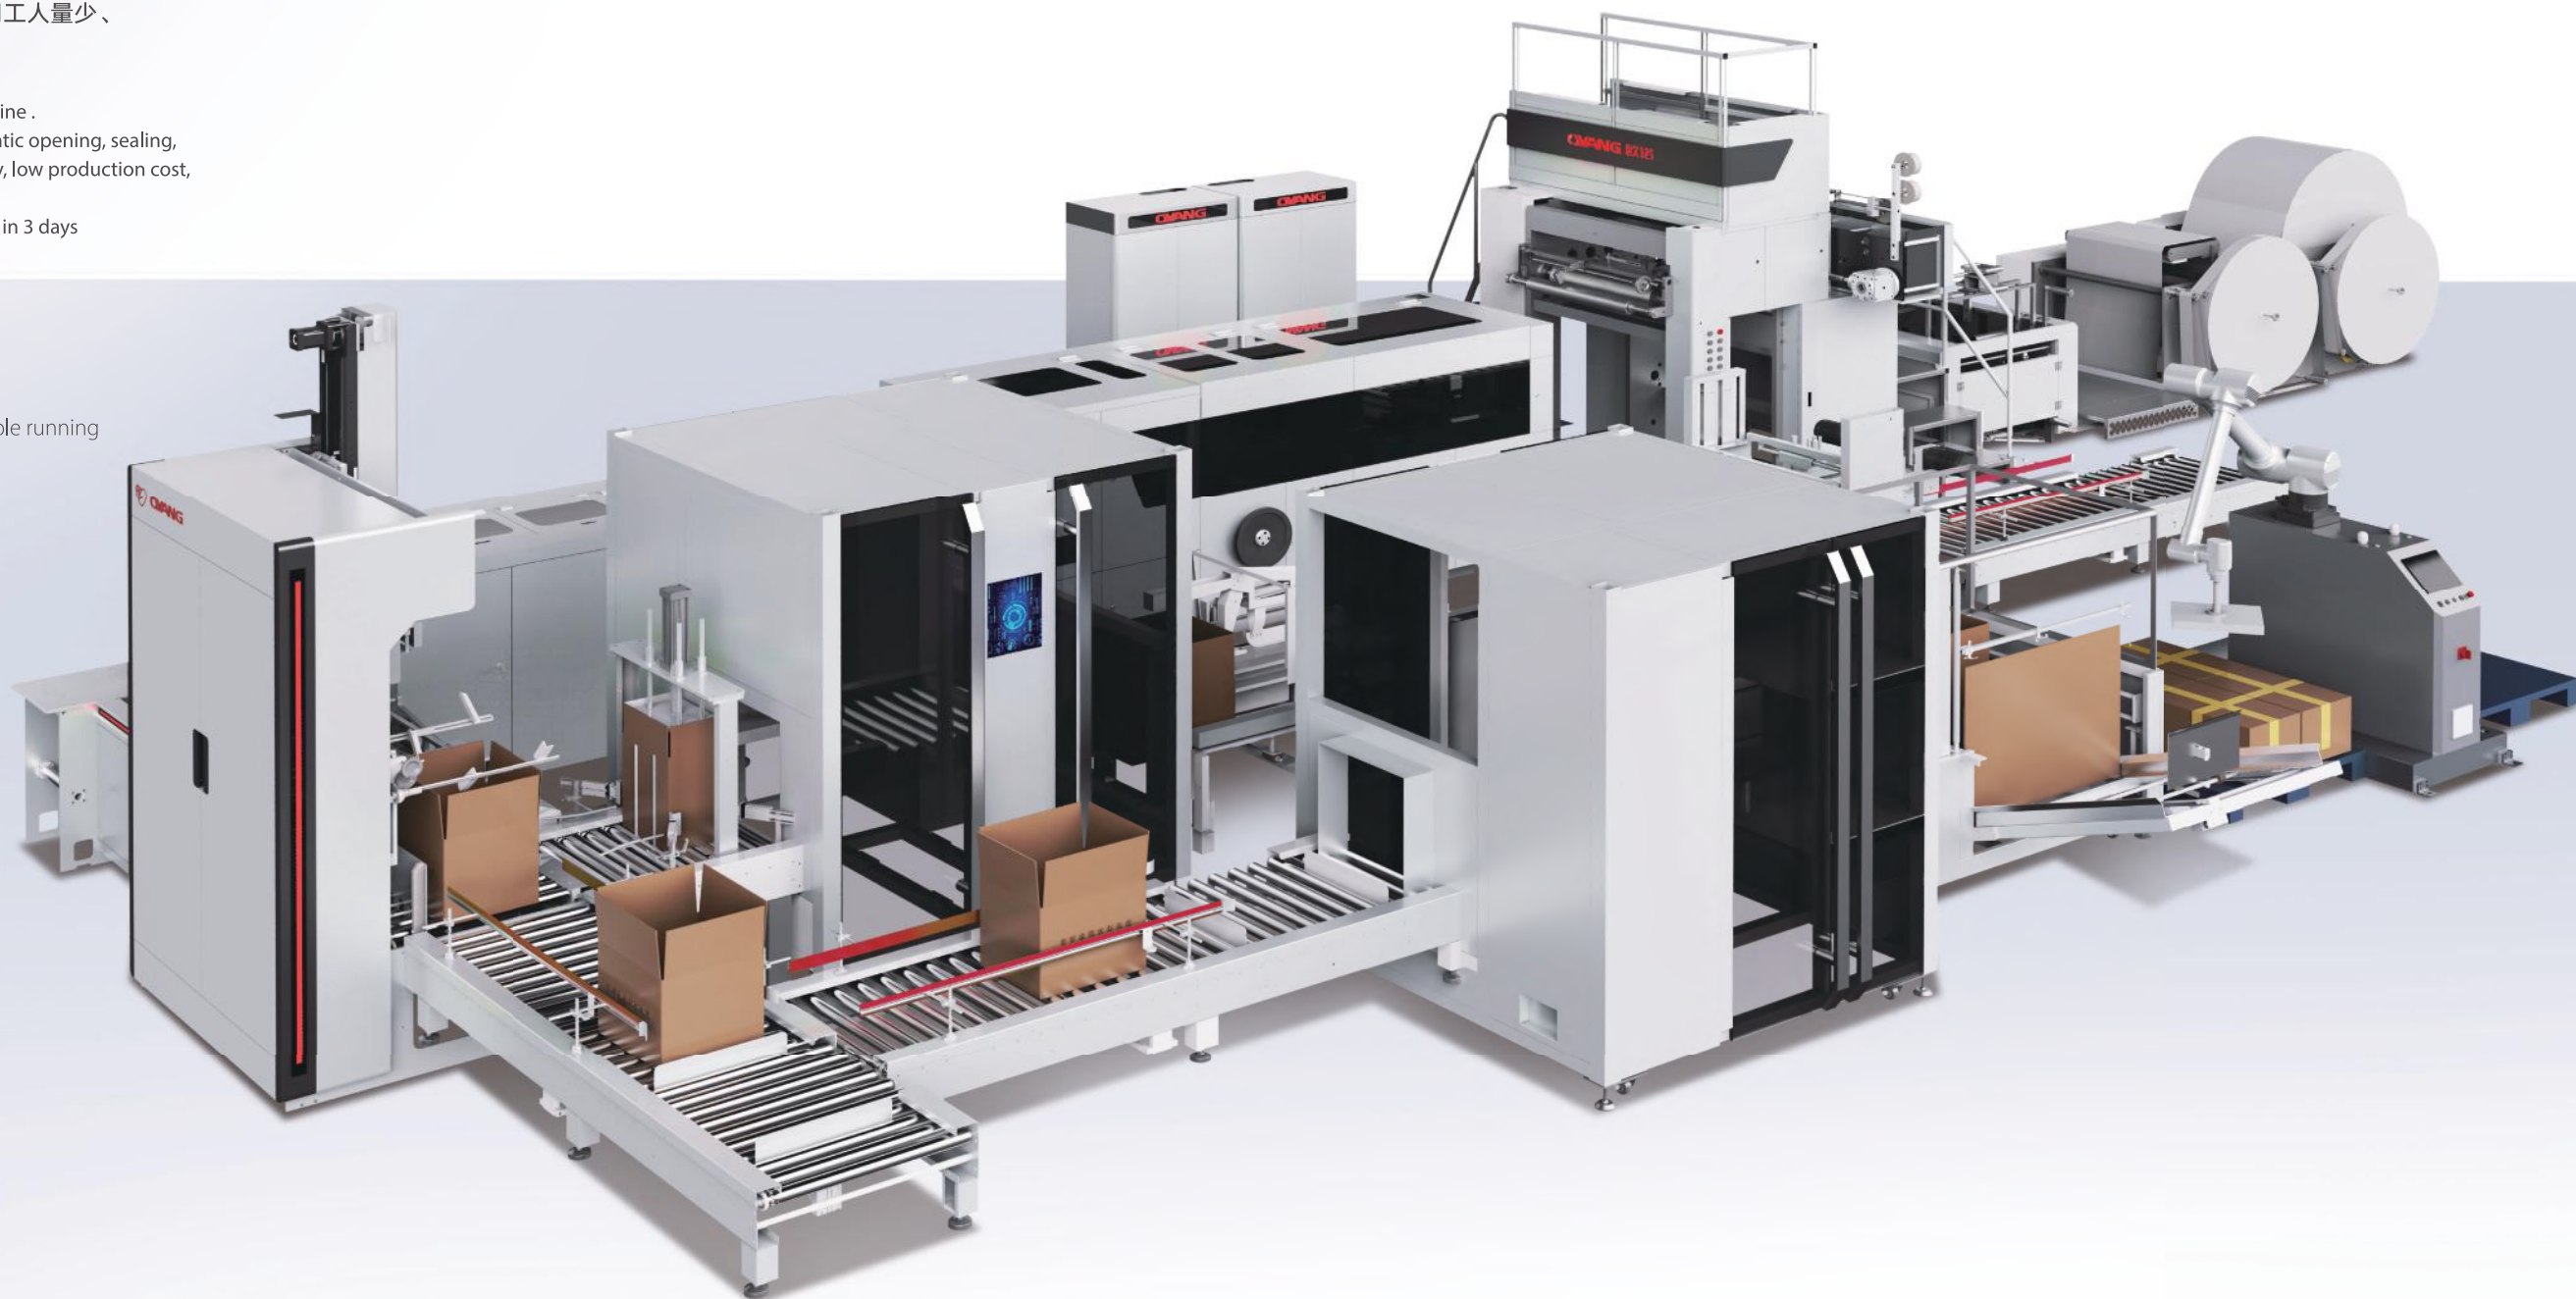

New World

型号	Model No.	A220-S/D	A400
纸料直径	Paper diameter	≤1500mm	≤1500mm
卷芯内径	Core inner diameter	Φ76mm	Φ76mm
纸张克重	Paper weight	70-140gsm	80-140gsm
纸袋面宽 (带手把 不带手把)	Paper bag width	120- 220mm 100-220mm	200- 400mm 150-400mm
*每台机器可定制3-4个尺寸		*Each machine can choose 3-4 customized bag size	
纸筒长度 (带手把/外折 不带手把/内折)	Paper tube length	190-350mm 190-430mm	280-550mm 280-600mm
纸袋底宽	Bottom width of paper bag	95-115mm	90-200mm
纸卷宽度	Paper roll width	290/370-710mm	510/610-1230mm
速度	Machine Speed	150-300pcs/min	150pcs/min
噪音指数	Noise Figure	75-80dB	75-80dB
总功率	Total power	32 KW	34 KW
机器重量	Machine weight	13000KG	18000KG
整机尺寸(L×W×H)	Machine dimensions	12×5×3.2 M	15×6×3.5M
圆绳手把机型号	Model No.	2HD	5HD
手把绳高	Handle rope height	90-110	95-115
手把贴片宽度	Handle patch width	40-50	45-50
手把贴片长度	Handle patch length	95	152
手把绳直径	Handle rope diameter	Φ3-5mm	Φ4-6mm
手把贴片纸卷直径	Diameter of Handle Patch Paper Roll	Φ1200mm	Φ1200mm
手把贴片纸卷宽度	Handle patch paper roll width	80-100mm	90-100mm
手把贴片克重	Handle patch weight	100-140g	100-140g
绳间距	Handle separation distance	47	76
*可选配2HD/3HD/5HD			

智
SMART
AS

17

卷筒纸全自动 (扁绳) 方底纸袋机
Automatic Roll-fed Square Bottom
Paper Bag Machine with Flat Handle

New World

型号	Model No.	AS 330	AS 400	AS 450	AS 460	AS 560
纸料直径	Paper diameter	≤1500mm	≤1500mm	≤1500mm	≤1500mm	≤1500mm
卷芯内径	Core inner diameter	Φ76mm	Φ76mm	Φ76mm	Φ76mm	Φ76mm
纸张克重	Paper weight	80-140gsm	80-140gsm	80-140gsm	90-140gsm	90-140gsm
纸袋面宽 (带手把) (不带手把)	Paper bag width	200- 330mm 150-330mm	200- 400mm 150-400mm	200- 450mm 150-450mm	220-460mm 220-460mm	280-560mm 280-560mm
纸筒长度 (带手把/外折) (不带手把/内折)	Paper tube length	280-430mm 280-530mm	280-550mm 280-600mm	280-550mm 280-600mm	320-670mm 320-770mm	320-670mm 320-770mm
纸袋底宽	Bottom width of paper bag	80-180mm	90-200mm	90-200mm	90-260mm	90-260mm
纸卷宽度	Paper roll width	490/590-1050mm	510/610-1230mm	510/610-1330mm	650-1470mm	770-1670mm
扁手把绳高	Flat Handle Rope Height	75mm	75mm	75mm	100mm	100mm
扁绳宽度	Flat Handle Rope Width	12mm	16mm	16mm	16mm	16mm
扁绳纸卷宽度	Paper Rope Roll Width	85mm	95mm	95mm	95mm	95mm
扁绳纸卷直径	Paper Rope Roll Diameter	Φ1200mm	Φ1200mm	Φ1200mm	Φ1200mm	Φ1200mm
扁绳纸克重	Paper Rope Thickness	70~80g/m ²	70~ 80g/m ²	70~ 80g/m ²	80~ 100g/m ²	80~ 100g/m ²
手把贴片长度	Handle Patch Length	160mm	170mm	170mm	170mm	170mm
手把贴片宽度	Handle Patch Width	52mm	52mm	52mm	52mm	52mm
手把贴片纸卷直径	Paper Patch Roll Diameter	Φ1200mm	Φ1200mm	Φ1200mm	Φ1200mm	Φ1200mm
手把贴片纸卷宽度	Paper Patch Roll Width	160mm	170mm	170mm	170mm	170mm
手把贴片纸克重	Paper Patch Thickness	80~110g/m ²	80~110g/m ²	80~110g/m ²	80~110g/m ²	80~110g/m ²
最大速度	Max. Speed	150pcs/min	120pcs/min	120pcs/min	120pcs/min	120pcs/min
机器功率	Total Power	25kw	29kw	29kw	29kw	29kw
机器重量	Total Weight	20000kg	22000kg	22000kg	23000kg	24000kg
外形尺寸(L×W×H)	Overall Dimension	15×4.5×3.4 M	16×5×3.4 M	16×5×3.4 M	16.5×5.5×3.5 M	16.5×5.5×3.5 M



高速专机系列


High Speed Fix Size
Paper Bag Machine

性能及特点 Feature & Characteristics

专为单一规格大批量订单生产而设计的高速专规机，效率高，生产成本低、日产能突破60+万

Designed specifically for high-volume orders of a single specification, the high-speed specialized cutting machine offers high efficiency and low production costs, with a daily production capacity exceeding 600,000 units.

型号	Model No.	Number2	Number4	Number6	Number8	Number12
纸袋面宽	Paper bag width	105 mm	127 mm	152 mm	156 mm	178 mm
纸袋底宽	Bottom width of paper bag	64 mm	79 mm	92 mm	102 mm	108 mm
纸袋长度	Paper bag length	200 mm	248 mm	279 mm	314 mm	320 mm
纸筒长度	Paper tube length	239 mm	295 mm	335 mm	375 mm	391 mm
速度	Speed	350-600个/分钟 350-600pcs/min				

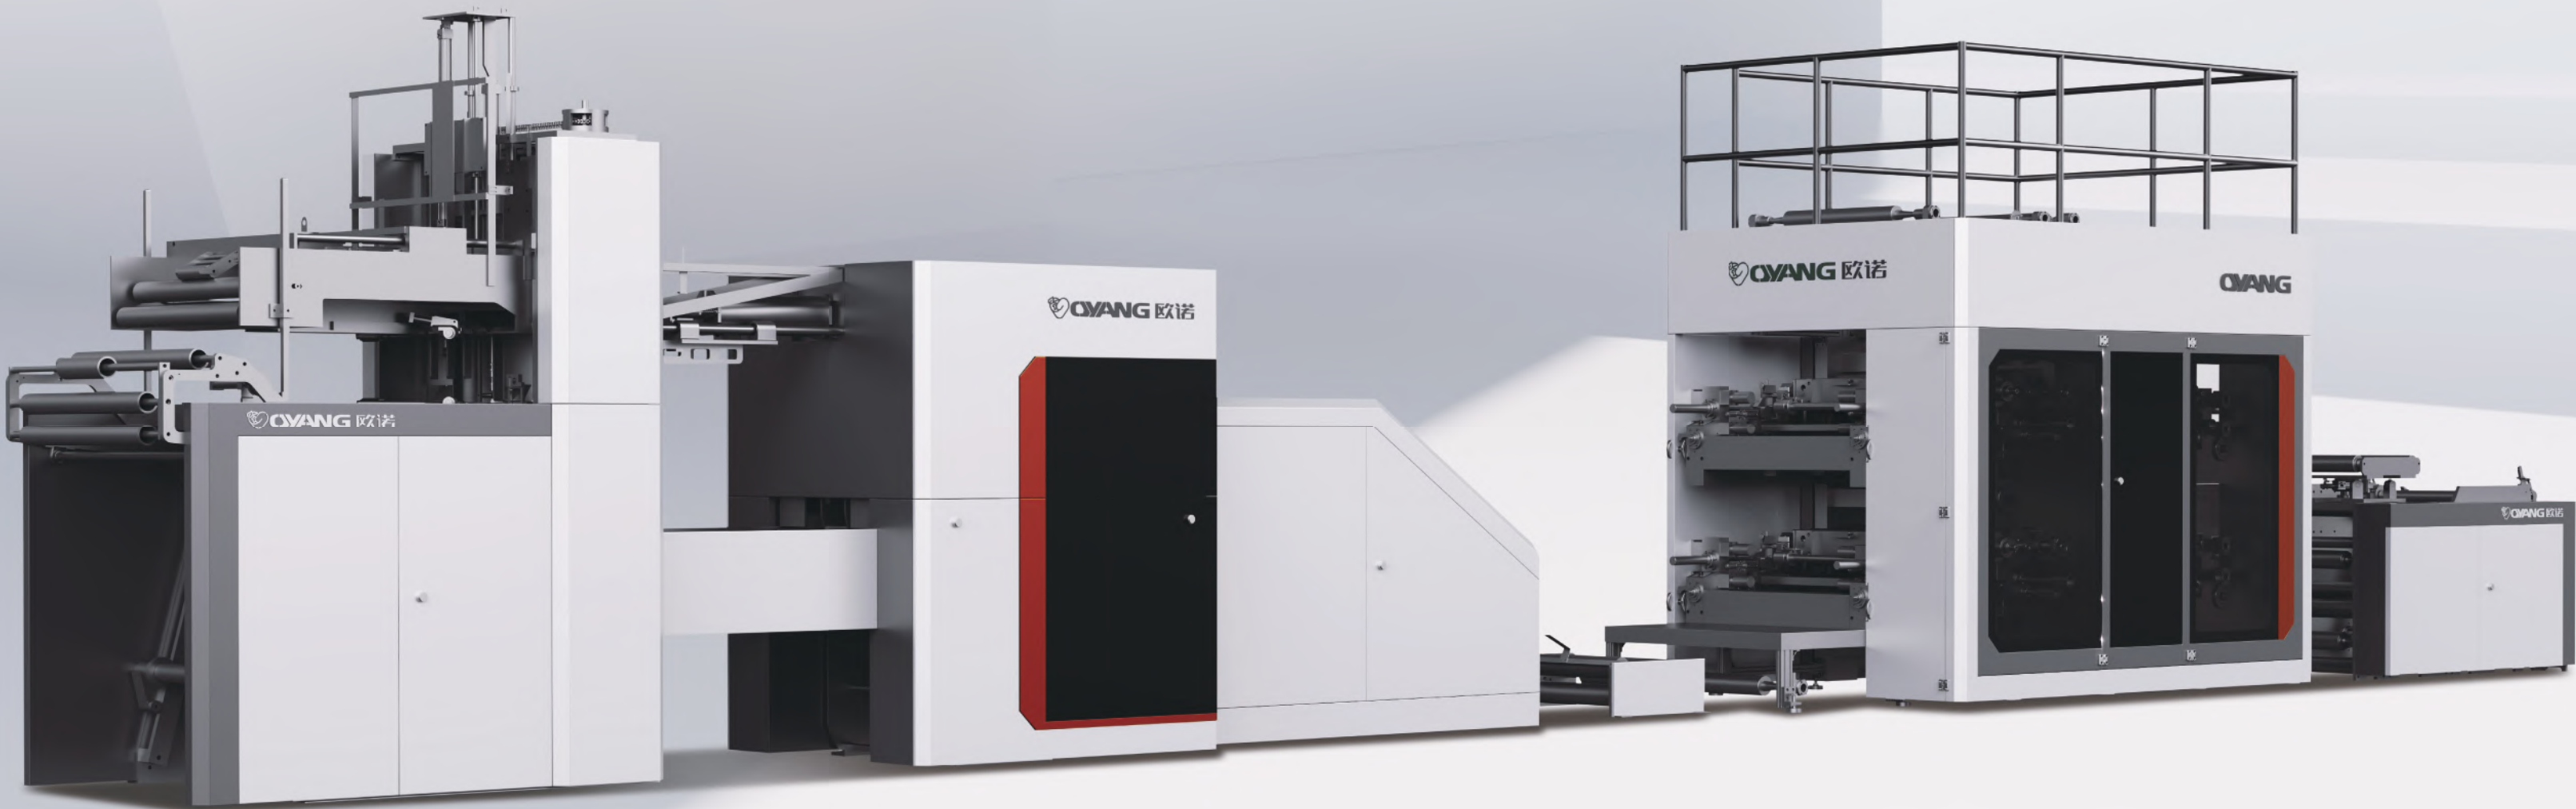

诺

OYANG

16A

全自动圆绳纸袋机系列（手提袋）
Automatic Roll-fed Twist
Rope Paper Bag Machine Series



New World

型号	Model No.	A 220	A 330	A 400	A 450	A 460	A 560
纸料直径	Paper diameter	≤1500mm	≤1500mm	≤1500mm	≤1500mm	≤1500mm	≤1500mm
卷芯内径	Core inner diameter	Φ76mm	Φ76mm	Φ76mm	Φ76mm	Φ76mm	Φ76mm
纸张克重	Paper weight	70-140gsm	80-140gsm	80-140gsm	80-140gsm	80-140gsm	90-140gsm
纸袋面宽	Paper bag width	120- 220mm	200- 330mm	200- 400mm	200-450mm	240-460mm	280-560mm
		80-220mm	150-330mm	150-400mm	150-450mm	220-460mm	280-560mm
纸筒长度	Paper tube length	190-350mm	280-430mm	280-550mm	280-550mm	320-650mm	320-650mm
		190-430mm	280-530mm	280-600mm	280-600mm	320-770mm	320-770mm
纸袋底宽	Bottom width of paper bag	50-120mm	80-180mm	90-200mm	90-200mm	90-260mm	90-260mm
纸卷宽度	Paper roll width	290/370-710mm	490/590-1050mm	510/610-1230mm	510/610-1330mm	650/690-1470mm	770-1670mm
速度	Machine Speed	150pcs/min	150pcs/min	150pcs/min	150pcs/min	130pcs/min	100pcs/min
总功率	Total power	32 kW	32 kW	34 kW	34kW	34kW	34kW
机器重量	Machine weight	13000KG	16000KG	18000KG	18000KG	21000KG	22000KG
整机尺寸(LxWxH)	Machine dimensions	12×5×3.2 M	14×6×3.5 M	15×6×3.5 M	15×6×3.5 M	16×6×3.5 M	16×6×3.5 M

圆绳手把机型号	Model No.	2HD	3HD	5HD	6HD
手把绳高	Handle rope height	90-110	90-110	95-115	100-120
手把贴片宽度	Handle patch width	40-50	45-50	45-50	45-50
手把贴片长度	Handle patch length	95	114	152	190
手把绳直径	Handle rope diameter	Φ3-5mm	Φ4-6mm	Φ4-6mm	Φ4-6mm
手把贴片纸卷直径	Diameter of Handle Patch Paper Roll	Φ1200mm	Φ1200mm	Φ1200mm	Φ1200mm
手把贴片纸卷宽度	Handle patch paper roll width	80-100mm	90-100mm	90-100mm	90-100mm
手把贴片克重	Handle patch weight	100-140g	100-140g	100-140g	100-140g
绳间距	Handle separation distance	47	57	76	95



诺

OYANG

16B

半自动纸袋机 (手捧袋)

Semi-automatic Roll-fed

Paper Bag Machine (Without Handle)



New World

型号	Model No.	B 220	B 330	B 400	B 450	B 460	B 560
纸袋长度(切长)	Paper bag length	190-430mm	280-530mm	280-600mm	280-600mm	320-770mm	320-770mm
纸袋宽度	Paper bag width	80-220mm	150-330mm	150-400mm	150-450mm	220-460mm	280-560mm
袋底宽度	Paper bag bottom width	50-120mm	70-180mm	90-200mm	90-200mm	90-260mm	90-260mm
纸袋厚度	Paper thickness	45-150g/m²	60-150g/m²	70-150g/m²	70-150g/m²	70-150g/m²	80-150g/m²
机械速度 (运行最大速度)	Machine Speed	280pcs/min	220pcs/min	200pcs/min	200pcs/min	150pcs/min	150pcs/min
纸卷宽度	Paper roll width	290-710mm	470-1050mm	510-1230mm	510-1330mm	650-1470mm	770-1670mm
纸料直径	Roll paper diameter	≤1500mm	≤1500mm	≤1500mm	≤1500mm	≤1500mm	≤1500mm
整机功率	Machine power	3相4线380V 15kw	3相4线380V 8kw	3相4线380V 15.5kw	3相4线380V 15.5kw	3相4线380V 25kw	3相4线380V 27kw
整机重量	Machine weight	5600kg	8000kg	9000kg	9000kg	12000kg	13000kg
整机尺寸(L×W×H)	Machine size	8.6×2.6×1.9M	9.5×2.6×1.9 M	10.7×2.6×1.9 M	10.7×2.6×1.9 M	12×4×2 M	13×2.6×2 M

诺 OYAN B(T+D+W+P) 16

卷筒纸方底纸袋机 (选配功能)
Roll-fed Square Bottom Paper
Bag Machine (Options functional)

New World



+P

1

派奇单元
Patching &
Punching Unit

+W

2

开窗单元
Die Cutting & Film
Patching Unit

+D


3

双层单元
Double Layers Unit

+T

4

印刷单元
Printing Unit

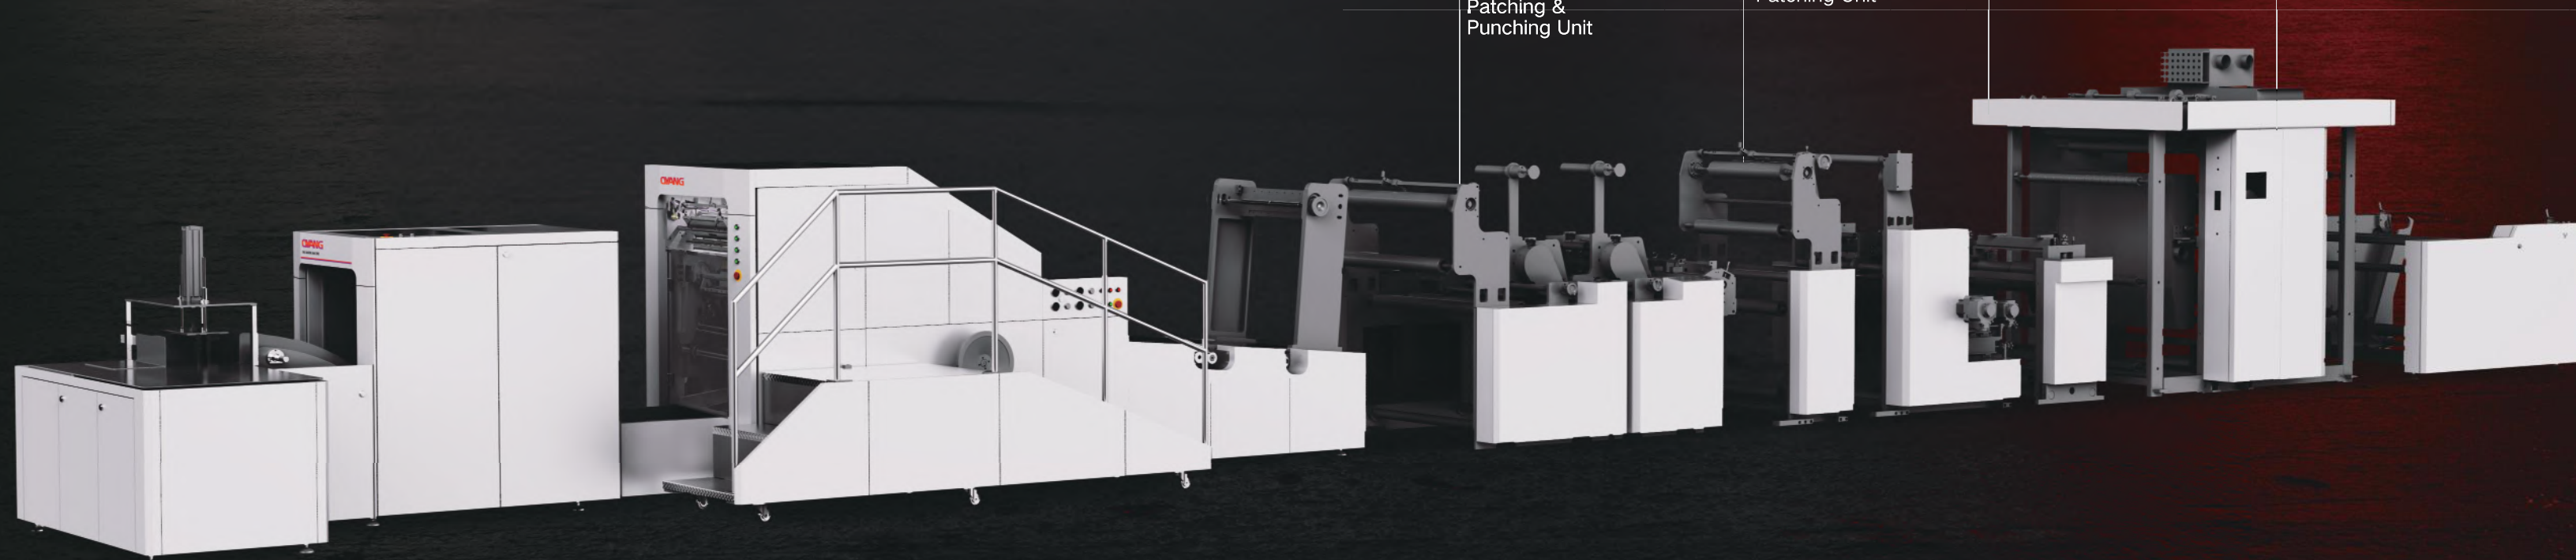

诺
OYANG

16C

尖底纸袋机

Roll-Fed Sharp Bottom Paper Bag Machine

New World

型号	Model No.	C 270	C 330
纸袋厚度	Paper Thickness Range	30-100 GSM	30-100 GSM
纸袋宽度	Paper Bag Width Range	80-270mm	80-330mm
切断长度	Paper Bag Length Range	100-380mm	120-720mm
侧面折叠范围	Side Folding Range	0-60mm	0-60mm
产品偏差	Production Precision	±0.2mm	±0.2mm
生产速度	Machinery Speed	150-500 pcs /min	150-500 pcs /min
最大放纸宽度	Maximum paper roll Width	900mm	1000mm
最大放卷直径	Maximum Paper roll Diameter	1500mm	1500mm
整机功率	Total Power	16 kW	16 kW
机器重量	Machine Weight	5000KGS	5500KGS
机器颜色	Machine Color	White or other	White or other
机器尺寸	Machine Size	7300×2000×1850mm	7700×2000×1900mm



诺

OYAN

P510

16

尖底纸袋机

Roll-Fed Sharp Bottom Paper Bag Machine



双通道，产能翻倍

Double channel, Double Capacity



New World

型号	Model No.	P 510
平口袋袋宽	Flat Paper bag width range	60-510mm
侧面折叠式袋宽	Insert paper bag width range	60-510mm
切断长度	Paper bag cutting length	100-380mm
侧宽范围	Side Folding Range	0-70mm
高低口	Bag mouth high cut size range	10-20mm
底部折叠	Bag bottom folding size	15-20mm
最大纸张宽度	Maximum paper roll Width	1100mm
最大纸卷直径	Maximum Paper roll Diameter	1300mm
气胀轴直径	Diameter for the paper core	76mm
纸张克重	Paper GSM	30-60 gsm
最高速度	Machine speed	600-2400 pcs/min
		机器的速度和纸张的物理属性 及袋子的规格密切相关 The speed is influence by paper physical property and the bag size
总功率	Power	52kw 380V 3phase



智

SMART

17

卫星式柔印机 (幅宽 800-1400mm)

CI Flexo Printing Machine

(Web Width:800-1400mm)

卫星式柔印机广泛应用在铜版纸、卡纸、拷贝纸、BOPP、PET、塑料薄膜等多种材料上印刷。
用于纸杯、纸盒、食品包装袋、包装纸等印刷领域。
Coated paper, cardboard, copy paper, BOPP, PET, plastic film, etc., widely used in paper cup, paper box, food package bag, packaging paper and the like printing fields.

无齿轮驱动
版辊,网纹辊均采用套筒设计
快速换活
工作的“可重复性”
No gear control
Anilox roller and plate cylinder adopt sleeve technology
Quick job changes
Precise print lengths, especially on extensible films subject to stretch or extension during their process
Job repeatability



New World

		800	900	1000	1100	1200	1300	1400
色组数	Colors	8						
中心滚筒直径	Central Drum Diameter	1850mm						
最大纸幅宽度	Max Web Width	820mm	920mm	1020mm	1120mm	1220mm	1320mm	1420mm
最大印刷宽度	Max Printing Width	800mm	900mm	1000mm	1100mm	1200mm	1300mm	1400mm
印版重复长度	Repeat	350-800mm (850mm 选配)						
最大放卷直径	Max Unwinding Diameter	P 系列 : 1000mm F 系列 : 800mm						
最大收卷直径	Max Rewinding Diameter	P 系列 : 1000mm F 系列 : 800mm						
最大设计速度	Max Printing Peed	400m/min						
干燥系统	Drying	电加热 / 天然气 / 蒸汽 / 热油 Electric heating / Gas / Steam / Hot oil						
适用油墨	Applicable Ink	环保水性油墨 / 溶剂型油墨 Eco-friendly water-based ink/Solven in						
承印材料种类	Materials	P 系列 : 纸 paper F 系列 : 膜 (PE、OPP、PET、珠光膜等类似特性材料); 纸 film(pe,opp,pet,etc.);paper						
材料厚度范围	Thickness	P 系列 : 纸 25-300gsm F 系列 : 膜 (10-150ym); 纸 (25-120gsm)film(10-150ym); paper(25-120gsm)						



YTB 系列 / SERIES

层叠式高速柔版印刷机
StackType High Speed Flexographic Printing Machine

型号 Model No.		YTB41300	YTB41200	YTB4100	YTB4800	
印刷功能 Size Range	最大印料宽度 Max.Printing Material Width	1300mm	1200mm	1000mm	800mm	
	最大印刷宽度 Max Printing width	1260mm	1160mm	960mm	1260mm	
印刷速度 Printing Speed		5-100m/min				
介质 Media	最大放卷直径 Max.Unwinding diameter	1300mm				
	最大收卷直径 Max.Rewinding diameter	1300mm				
	印品长度范围 Printing length range	300-1000mm				
版厚度 Overall Size/Gross Weight		1.14mm	1.7mm	2.28mm	2.84mm	3.94mm
		可订制 Customized is available				



FE 系列 / SERIES

中宽幅柔印机（幅宽700mm-1800mm）
Medium&wide Web Flexo Printing Machine(Web Width:700mm-1800mm)

中宽幅柔印机可以在轻涂纸，灰底白板纸，铜版纸，卡纸，无纺布、牛皮纸、纸塑复合材料等多种材料上印刷已广泛应用于包装纸、纸盒纸袋、纸杯、快递袋及啤酒箱、饮料箱、食品箱等纸箱预印领域。

This machine is widely used in light-weight coated paper, duplex board, coated paper, cardboard, non-woven fabric, kraft paper, paper-plastic composite material, etc It is widely used in packaging paper, paper box/bag, paper cup, courier bag, beer carton, food carton and the like pre-printing fields .

		27.5" 20700	35.5" 20900	39.5" 201000	47.5" 201200	51" 201300	56.5" 201430	63" 201600	71" 201800
最大纸幅宽度	Max Web Width	720mm	920mm	1020mm	1220mm	1320mm	1450mm	1 620mm	1820mm
最大印刷宽度	Max Printing Width	700mm	900mm	1000mm	1200mm	1300mm	1430mm	1600mm	1 800mm
最大模切宽度	Max Die-cutting Width	700mm	900mm						
印版重复长度	Printing Repeat Length	286-900mm (300-1200)	286-900mm (300-1200)	286-900mm (300-1200)	286-900mm (300-1200)	520-1500mm	520-1500mm	420-1600mm	420-1600mm
最大放卷直径	Max Unwinding Diameter	1524mm	1524mm	1524mm	1524mm	1524mm	1524mm	1524mm	1524mm
最大收卷直径	Max Rewinding Diameter	1524mm	1524mm	1524mm	1524mm	1524mm	1524mm	1524mm	1524mm
齿距	Cearing	3.175	3.175	3.175	3.175	3.175	3.175	6.35	6.35
最大设计速度	Max Printing Speed	伺服驱动 :240m/min Single servo motor driven Dual servo motor driven:240m/min				伺服驱动 :200m/min Single servo motor driven Dual servo motor driven:200m/min			
干燥方式	Drying Mode	热风干燥 / 红外干燥 Hot-air drying/IR drying							
适用油墨	Applicable Ink	环保水性油墨 / 溶剂型油墨 Eco-friendly water-based ink/Solvent ink							



ONL-SL

分切机

Slitting Machine

范围及特点

Performance & Characteristics

本机适用于各种超大型卷材的分切和复卷,如 20g/m -400g/m 牛皮纸、白卡纸、淋膜纸、硅油纸、铝箔、锡纸、PVC 薄膜、无纺布材料等卷材。该机采用三伺服电机控制,自动锥度张力,中心卷取方式。主机采用变频调速,保持加速中平衡运转。自动计米、报警等功能。收卷采用上下 A、B 气胀轴结构,链条。自动卸料、操作方便。放卷采用超声波 /CCD 纠偏修正系统,使不规则材料能正常分切。采用圆刀 / 平刀纵切的分切方式,高压风机废边自动排除装置。气胀轴自动上料方式 / 液压无轴自动放卷装置。

Machine suitable many kinds of jumbo roll materials,such as adhesive stickers/PVC/PET/Release paper/breathable film/Pearlized BOPP.I.This machine adopts PLC(Siemes)/Servo motor control and auto-matic taper tension,central surface rewinding,Frequency control of motor,run smoothly in acceleration.It has the functions of automatic counting meter, automatic alarm, etc. Adopt A and B pneumatic shaft structure for rewinding, easy for loading and unloading.It adopts ultrasonic /CCD automatic edge correction adjustment system for unwinding, anomalistic materials will be easy slit. Equipped with automatic waste film blowing device, Automatic material loading by pneumatic, matched with air.

型号 Model	SL- 1300	SL- 1600	SL- 1800
放卷最大宽幅 Maximum Width Of Unwinding	1300mm	1600mm	1800mm
放卷最大直径 Maximum Diameter Of Unwinding	φ1400mm		
分切最小宽度 Minimum Width Of Slitting	30mm		
收卷最大直径 Maximum Diameter Of Winding	φ1000mm		
分切速度 Speed Of Slitting	≤350m/min		
功率与电源 Power Supply	380V/50hz 24kw	380V/50hz 26kw	380V/50hz 30kw
尺寸与重量 Size And Weight	4000kg 3300x 3150x1930mm	4500kg 3300x 3450x1930mm	5500kg 3300x 3650x1930mm



ONL-HFA

自动扁绳手挽机

Automatic Flat Paper Handle Pasting Machine



ONL-HRA

全自动圆绳手挽机

Automatic Round Rope Paper Handle Pasting Machine



ONL-TW2

双头纸绳机

Double Station Twisted Paper Rope Machine



ONL-TW1

单头纸绳机

Single Station Twist Paper Rope Making Machine



ONL-RE

复卷机

Paper Rope Rewinding Machine

机器型号	Type	ONL-HFA
外形尺寸	Overall dimension	L7000*W2450*H1700mm
电机品牌	Motor brand	ZHENGMING geared motor
机器功率	Total power	12.2KW, 50HZ
伺服电机品牌	Servo motor brand	INOVANCE
伺服电机功率	Servo motor power	750W two group
PIC编程品牌	PIC programming brand	INOVANCE
热熔胶机品牌	Hot melt machine brand	XBS
机械手	Mechanical arm	DELTA Taiwan
纠偏	Correct an error	KCON
纸绳间距(A)	Handle Spacing	108mm
纸绳宽度(B)	Paper Rope Width	12mm
纸绳高度(C)	Paper Rope Height	100mm
纸片宽度(D)	Paper Width	40mm
纸片长度(E)	Paper Length	190-170-152mm
纸绳长度	Paper Rope Length	352mm
纸袋厚度	Paper thickness	90-130g
纸袋宽度	Bag width	200-450mm
纸袋高度	Bag height	200-450mm
袋口140mm以上 (袋宽减去风琴位的宽度)	Top opening size over 140mm	(Bag Width minus the width of folding)
生产速度	Production speed	33-43pcs/min

机器型号	Type	ONL-HRA
外形尺寸	Overall dimension	L6000*W2450*H1700mm
电机品牌	Motor brand	ZHENGMING geared motor
机器功率	Total power	380V, 10KW, 50HZ
伺服电机品牌	Servo motor brand	INOVANCE
伺服电机功率	Servo motor power	750W two group
PIC编程品牌	PIC programming brand	INOVANCE
热熔胶机品牌	Hot melt machine brand	XBS
机械手	Mechanical arm	DELTA Taiwan
纠偏	Correct an error	KCON
纸绳间距(B)	Paper Rope Handle Spacing	75mm、95mm
纸片宽度(C)	Paper width	40mm
纸绳长度	Paper rope length	360mm
纸绳高度	Paper rope height	140mm
原纸克重	Paper Gram Weight	90-130g/ m²
纸袋宽度	Bag width	200-450mm
纸袋高度	Bag height	200-450mm
袋口130mm以上 (袋宽减去风琴位的宽度)	Top opening size over 130mm	(Bag Width minus the width of folding)
生产速度	Productio speed	33-43pcs/min

机器型号	Type	ONL-TW1	ONL-TW2
纸卷内径	Core Diameter of Raw Rope Roll	Φ76 mm(3")	Φ76 mm(3")
最大纸卷外径	Max. Paper Rope Diameter	100-800mm	100-800mm
纸卷宽度	Paper Roll Width	25-100mm	25-100mm
原纸克重	Paper Thickness	20-60g/ m²	20-60g/ m²
纸绳直径	Paper Rope Diameter	Φ2.5-6mm	Φ2.5-6mm
最大收卷外径	Max. Rope Roll Diameter	300mm	300mm
最大绳卷宽度	Max. Paper Rope width	300mm	300mm
生产速度	Production Speed	10-15m/min	20-25m/min
输入电源	Power Requirements	380V	380V
机器功率	Total Power	1.1KW	1.5KW
机器重量	Total Weight	Approx.400KG	Approx.700KG
外形尺寸	Overall Dimension(LxWxH)	1580×1150×930mm	1580×1440×930mm

机器型号	Type	ONL-RE
原绳卷内径	Core Diameter of Raw Rope Roll	76 mm
最终绳卷内径	Core Diameter of Final Rope Roll	180 mm
最终绳卷外径	Final Rope Reel Diameter	400-600mm
生产速度	Max. Production Speed	80-150M/min
输入电源	Power Requirements	380V
机器功率	Total Power	2.2KW
机器重量	Total Weight	Approx.150KG
外形尺寸	Overall Dimension(LxWxH)	1050×800×1200mm